

## 2.4G Wireless Controlled Devices

Need a Control Center (gateway) connecting to App firstly.



### YE-880(IOT)-L Lighting Switch Control



Switch on/off and set time for the Lamp on smart-phone.


#### **Specification:**

Voltage: 250V

Rating power: 400W

#### **Steps for wiring connection:**

1. Put the switch box inside the Lamp.
2. Connect the lamp bulb to the wiring from switch box (Output)  
Connect the power cord to the threaded hole (Input)
3. Switch on/off the Lamp from App on smart-phone.

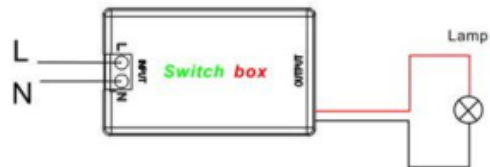

#### **User Instruction:**

1. Make sure the Control Center (gateway) is already connected to App.
2. Scan private S/N code on each 2.4G device for adding to App under the Control Center.